


Schutzvermerk DIN 34 beachten

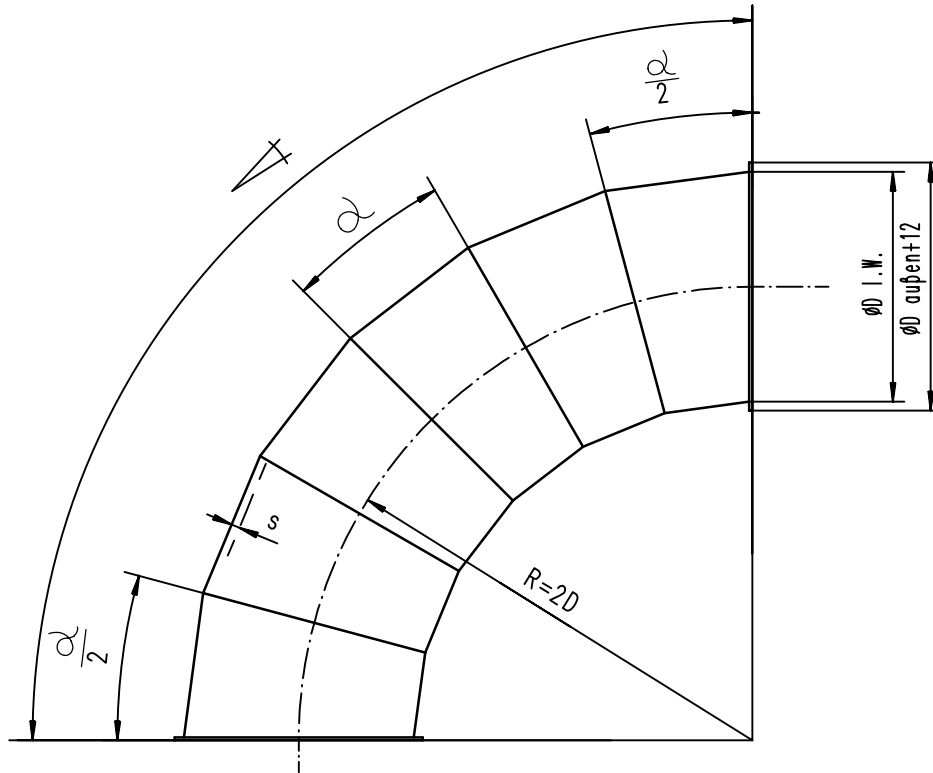

Segmentteilung

- ∠ 90° = 4x18° + 2x9°
- ∠ 60° = 2x20° + 2x10°
- ∠ 45° = 2x15° + 2x7,5°
- ∠ 30° = 1x15° + 2x7,5°

Die Artikel-Nr. bezieht sich auf grundrierte Ausführung

	∠	30°		45°		60°		90°	
ø500 ø450	Artikel-Nr.	12451343	13451343	12451344	13451344	12451346	13451346	12451349	13451349
	ø D i.W.	448	446	448	446	448	446	448	446
	s	2	3	2	3	2	3	2	3
	Gew. in kg	10,70	16,00	16,00	24,00	21,30	32,00	32,00	49,40
ø500 ø560	Artikel-Nr.	12501343	13501343	12501344	13501344	12501346	13501346	12501349	13501349
	ø D i.W.	498	496	498	496	498	496	498	496
	s	2	3	2	3	2	3	2	3
	Gew. in kg	13,20	19,80	19,80	29,60	26,40	39,60	39,30	59,30
ø630 ø500	Artikel-Nr.	12561343	13561343	12561344	13561344	12561346	13561346	12561349	13561349
	ø D i.W.	558	556	558	556	558	556	558	556
	s	2	3	2	3	2	3	2	3
	Gew. in kg	15,90	23,90	23,90	35,90	31,90	47,90	47,90	71,80
ø630 ø560	Artikel-Nr.	12631343	13631343	12631344	13631344	12631346	13631346	12631349	13631349
	ø D i.W.	628	626	628	626	628	626	628	626
	s	2	3	2	3	2	3	2	3
	Gew. in kg	19,00	28,50	29,60	42,70	37,90	56,90	56,90	85,40

Benennung

Segmentbogen R=2D

Datum: 13.12.2004	
Zeichn.-Nr. 4/82	Index 1